


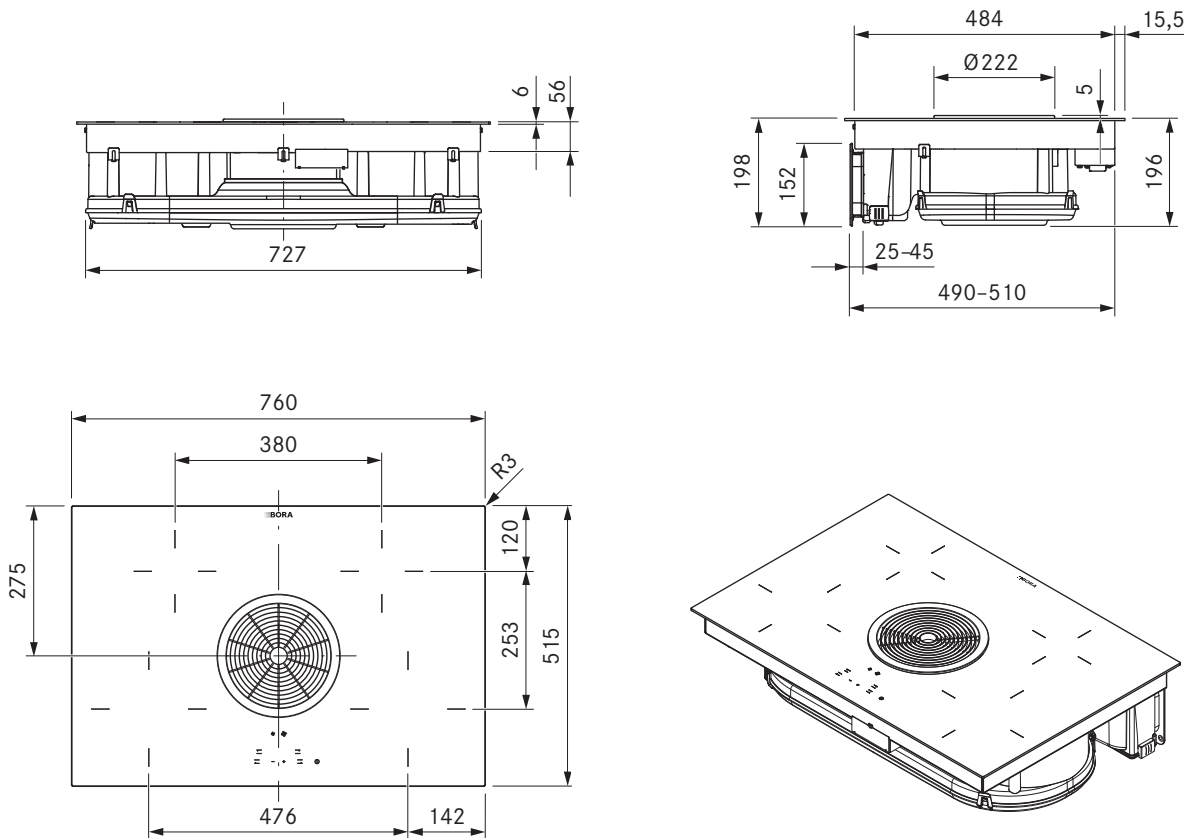

Technical data

Multiphase supply voltage	380 - 415 V 2N/3N
Single-phase supply voltage	220 - 240 V
Frequency	50 Hz
Maximum power consumption	7000 W
Three-phase power supply/fuse protection	3 x 16 A (standard connection)
Two-phase power supply/fuse protection	2 x 16 A
Single-phase power supply/fuse protection	1 x 32 A
Dimensions (width x depth x height)	760 x 515 x 196 mm
Weight (incl. accessories/packages)	25 kg
Surface material	Glass ceramic
Cooktop extractor power levels	1, 2, P
Cooktop power levels	1 - 9, P
Size of exhaust opening	650 x 90 mm
Size of front cooking zone	Ø 210 mm
Size of rear cooking zone	Ø 140 mm
Front cooking zone output	2300 W
Rear cooking zone output	1200 W
Front cooking zone power setting output	3000 W
Filter medium	Activated charcoal filter with ion exchanger
Filter material	Filter panel with fine filter
Maximum filter service life	150 h (1 year)

Product description

- Minimum volume
- Super fast parboiling
- Simple cleaning
- Genuine stainless steel grease filter
- Oversized 4 24 cooking surface
- Compact size
- automatic heat up function
- Childproofing feature
- Cooking zone timers
- Maximum storage space

Scope of delivery

- Basic Hyper cooktop with integrated cooktop extractor - Recirculation BHU
- Air inlet nozzle black
- stainless steel grease filter
- BAKFS activated charcoal filter
- telescopic pull-out
- mounting straps
- sealing tape
- cable routing clips
- height adjustment plate set
- operating and installation instructions

Accessories

- BAKFS activated charcoal filter set
- BFF stainless steel grease filter
- BFIED air inlet nozzle
- GP4ED Basic/GP4 air inlet nozzle
- BUSAE exhaust air conversion set
- UDB25 sealing tape
- BKR760 cooktop frame

Product- and planning instructions

- The power supply cable must be provided at the installation site
- Front power socket
- The Basic cooktop extractor system can be combined with all BORA sockets